FIELDS FIREMAN®

Feuerlöschgerät für landwirtschaftliche Fahrzeuge.
Fire extinguisher for agricultural vehicles.



Beschreibung

Für den Schutz von Traktoren, Erntemaschinen und weiteren landwirtschaftlichen Fahrzeugen vor Entstehungsbränden sowie der Bekämpfung von Flur- und Waldbränden in der Entstehungsphase. Die mobile Löschanlage wird an der Front- oder Heckdreipunktaufnahme jedes Traktors montiert und über dessen Hydrauliksystem betrieben.

Description

For protecting tractors, harvesters, and other agricultural vehicles from incipient fires, as well as for fighting field and forest fires in their early stages. The mobile fire suppression system is mounted on the front or rear three-point hitch of any tractor and is powered by the tractor's hydraulic system.







ISO 9001:2015 CERTIFIED

Atzlinger GmbH, A-4491 Niederneukirchen, Steggraben 8
Tel. +43 (0)7224 / 86 07-0, office@atzlinger.at, www.atzlinger.at

Technische Daten H1-650F-A:


Abmessungen	1720x1100x1010 mm (BxHxT)
Gewicht	400 kg / 1050 kg (leer/voll)
Tankinhalt Wasser	625 Liter
Tankinhalt Schaummittel	15 Liter
Länge Löschwasserschlauch D25	20 m
Löschdauer	bis zu 15 min
Wasserdruck	max. 4,0 bar
Sprühweite Wasser	bis zu 15 m
Pumpenantrieb	hydraulisch, ~ 30 L/min, 90 bar


Technical Data H1-650F-A:


Dimensions	1720x1100x1010 mm (WxHxD)
Weight	400 kg / 1050 kg (empty/full)
Water tank capacity	625 liters
Foam concentrate tank	15 liters
Length of extinguishing water hose D25	20 m
Extinguishing time	up to 15 min
Water pressure	max. 4,0 bar
Water spray range	up to 15 m
Pump drive	hydraulic, ~ 30 L/min, 90 bar

ISO 9001:2015 CERTIFIED
Atzlinger GmbH, A-4491 Niederneukirchen, Steggraben 8
Tel. +43 (0)7224 / 86 07-0, office@atzlinger.at, www.atzlinger.at

Abmessungen / Dimensions

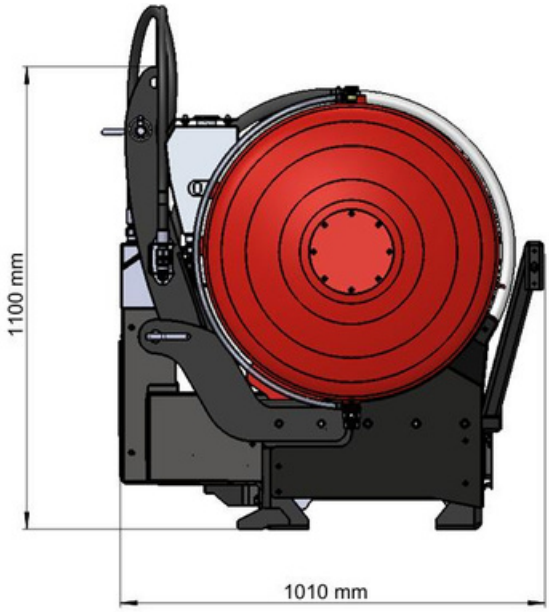

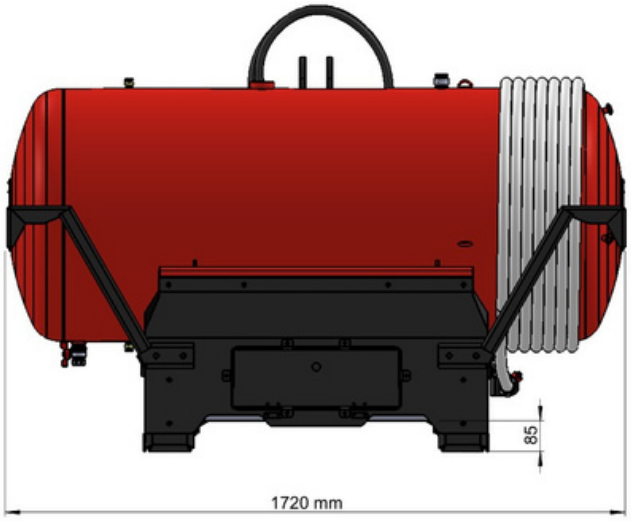

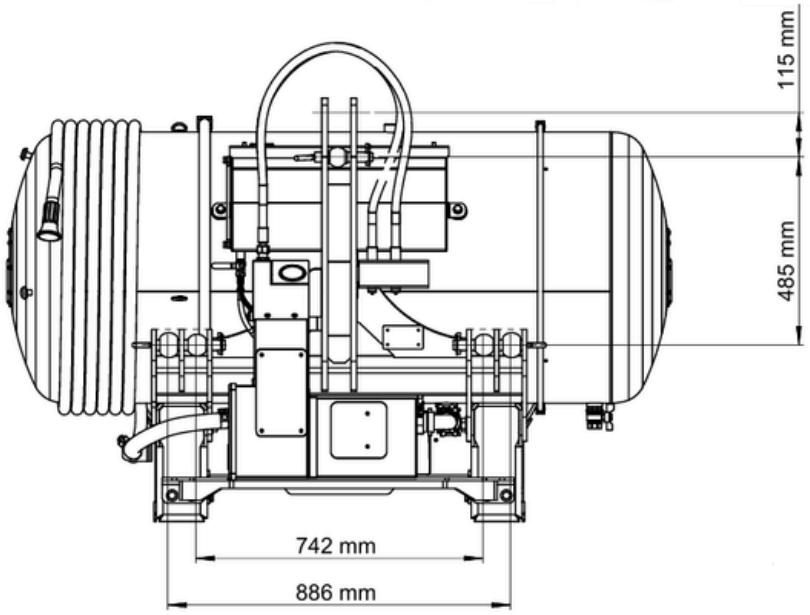

ISO 9001:2015 CERTIFIED

Atzlinger GmbH, A-4491 Niederneukirchen, Steggraben 8
Tel. +43 (0)7224 / 86 07-0, office@atzlinger.at, www.atzlinger.at

Enthaltenes Zubehör:

- 2 Stück Hydraulik Anschlussschlauch; Steckkupplung BG3
- Oberlenkerkugeln: Kat. 2, Außendurchmesser 50 mm
- Unterlenkerkugeln: Kat. 2, Außendurchmesser 56 mm und Kat. 3 Außendurchmesser 64 mm

Verfügbare Optionen:

- Beleuchtungskit
- Verlängerungsschlauch 10m
- Schaummittel 20 Liter

Accessories included:

- 2 pieces hydraulic connection hose; plug-in coupling BG3
- Top link balls: Cat. 2, outer diameter 50 mm
- Lower link balls: Cat. 2, outer diameter 56 mm and Cat. 3, outer diameter 64 mm

Available options:

- Lighting Kit
- 10-meter extension hose
- 20-liter foam concentrate







ISO 9001:2015 CERTIFIED

Atzlinger GmbH, A-4491 Niederneukirchen, Steggraben 8
Tel. +43 (0)7224 / 86 07-0, office@atzlinger.at, www.atzlinger.at